


# JV300 Series

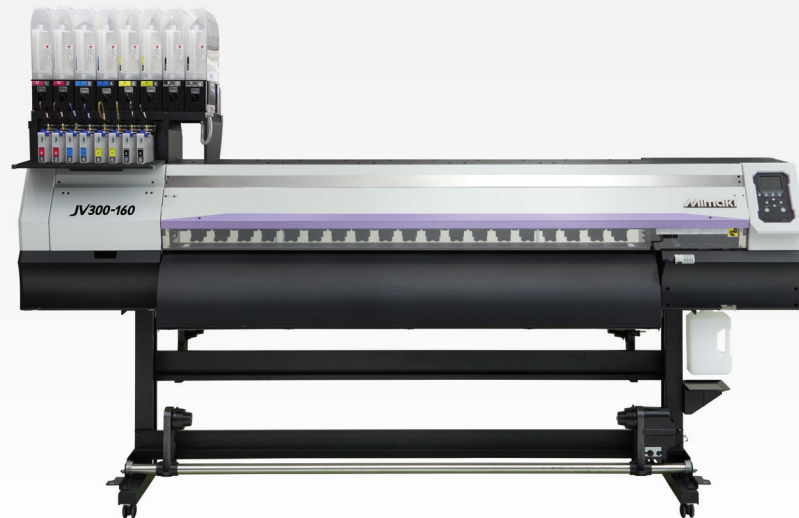

wide format inkjet printer

54"

64"

## High-quality, high-performance printer series

The JV300 Series inkjet printers deliver a remarkable range of applications. Gamut-extending eco solvent inks enable you to accomplish anything from fine art reproduction, wall décor and stunning backlits, to vehicle wraps and outdoor displays. Or choose dye sublimation inks to create vibrant wearable textiles, unique home fabrics or soft signage. Also available with dye-sublimation inks.

- Fast printing speeds up to 1,140 SqFt (105.9 SqM) per hour
- High quality print resolution of up to 1,440 dpi
- Choice of eco solvent or dye sublimation ink sets:
  - > Eco solvent: 9 color options including White, Orange and Light Black inks
  - > Dye sublimation: vibrant 6 color dye sub options
- 2-liter bulk ink system standard for most colors
- Nozzle Check Unit and Nozzle Recovery System
- 3-way intelligent heater

*For best results, always use Mimaki original inks*



<b>Printhead</b>	On-demand piezo, two staggered print heads per color	
<b>Print resolution</b>	300 dpi, 540 dpi, 720 dpi, 1,080 dpi, 1,440 dpi	
<b>Print speed (4 color mode)</b>	JV300-130	991 SqFt/Hr (92.1 SqM/Hr)
	JV300-160	1,140 SqFt/Hr (105.9 SqM/Hr)
<b>Maximum print width</b>	JV300-130	53.5 in (1,361 mm)
	JV300-160	63.3 in (1,610 mm)
<b>Maximum media width</b>	JV300-130	53.9 in (1,371 mm)
	JV300-160	63.7 in (1,620 mm)
<b>Ink Type/Color</b>	SS21 eco-solvent: C, M, Y, K, Lc, Lm, Lk, Or, W	
	ES3 eco-solvent: C, M, Y, K, Kc, Lm, W	
	Sb54 dye-sublimation: Bl, M, Y, K, Lbl, Lm	
<b>Ink Package size</b>	SS21: 2-liter bulk ink packs standard (440 ml cartridges available); White in 220ml cartridge only	
	ES3: 440 ml cartridges standard; White in 220ml cartridge only	
	Sb54: 2-liter bulk ink system standard (440 ml cartridges available)	
<b>Media thickness</b>	1.0 mm max	
<b>Rolled media weight</b>	88 lbs (40 kg)	
<b>Certifications</b>	VCCI class A, FCC class A, ETL UL 60950	
	CE Marking (EMC, Low voltage, and Machinery directive)	
	CB, RoHS, REACH, Energy Star, RCM	
<b>Interface</b>	USB 2.0	
<b>Power supply</b>	Single-phase (AC100 – 120V / AC200 – 240V) x2	
<b>Power consumption</b>	AC100V: 1.44kW x2 or less / AC200V: 1.92kW x2 or less	
<b>Operational environment</b>	Temperature: 59 – 86 °F (15 – 30 °C)	
	Humidity: 35 – 65% Rh (Non condensing)	
<b>Dimensions (W x D x H)</b>	JV300-130	101 x 28 x 71 in (2,530 x 710 x 1,800 mm)
	JV300-160	110 x 28 x 71 in (2,809 x 719 x 1,809 mm)
<b>Weight</b>	JV300-130	376 lbs (170.6 kg)
	JV300-160	402 lbs (182.4 kg)

wide format inkjet printer

54"

64"

Please visit us at: [www.mimakiusa.com](http://www.mimakiusa.com)

Mimaki USA, Inc.  
150-A Satellite Blvd NE, Suwanee, GA 30024

Print speeds are based on factory tests. Total throughput depends upon front-end driver/RIP, file size, printing resolution, ink coverage, network speed, etc. For best performance, always use Mimaki original inks. Specifications subject to change without notice.

Mimaki is a trademark of Mimaki Engineering Co. Ltd. Copyright 2019, Mimaki USA, Inc.

Rev. 04/24/19